NOVAP
AUTHORITIES

ACCESSIBILITY
Tactile Slabs




NOVAP
AUTHORITIES

TACTILE SLABS

Products Pages

Two-tone polyurethane slabs
458 x 420mm
Tilted stripes 45°
Available in 10 different colours

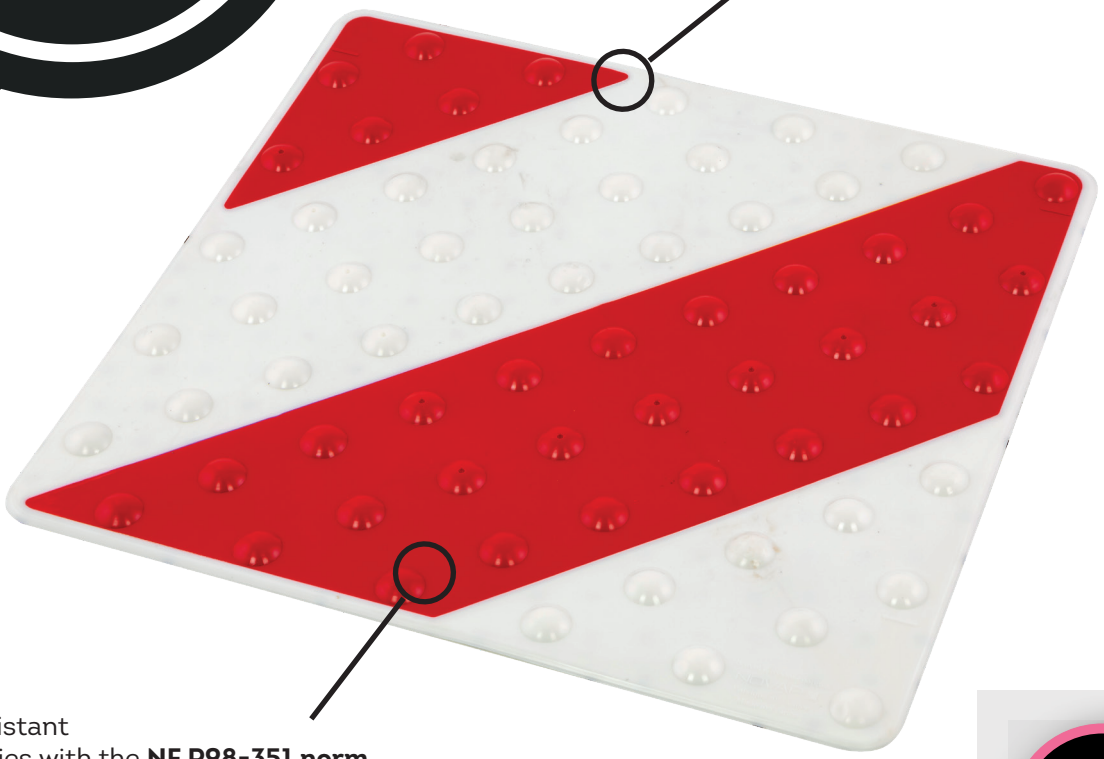

UV resistant
Complies with the **NF P98-351 norm**
- Relief domes diameter 25mm height 5mm
- Granit finish of the flat surfaces
- Wear indicator
- Position of the bosses
- Fire/Smoke classification

PATENTED PRODUCT

Installation advices:

Use the security tools: glasses, gloves and protection mask.
Clean up the floor (not wet) with a broom and put the slabs at their final position in order to delineate the exact surface with the masking tape.


Remove the slabs and apply the novap glue on the lower side before replacing them at their final position by pushing a slight pressure on the slabs.


Remove the masking tape and wait 8 hours for a complete drying.
Your installation is achieved.

More advices in our leaftlet delivered with the slabs.

NOVAP
AUTHORITIES

Products Pages

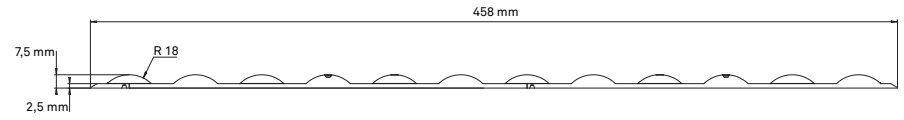

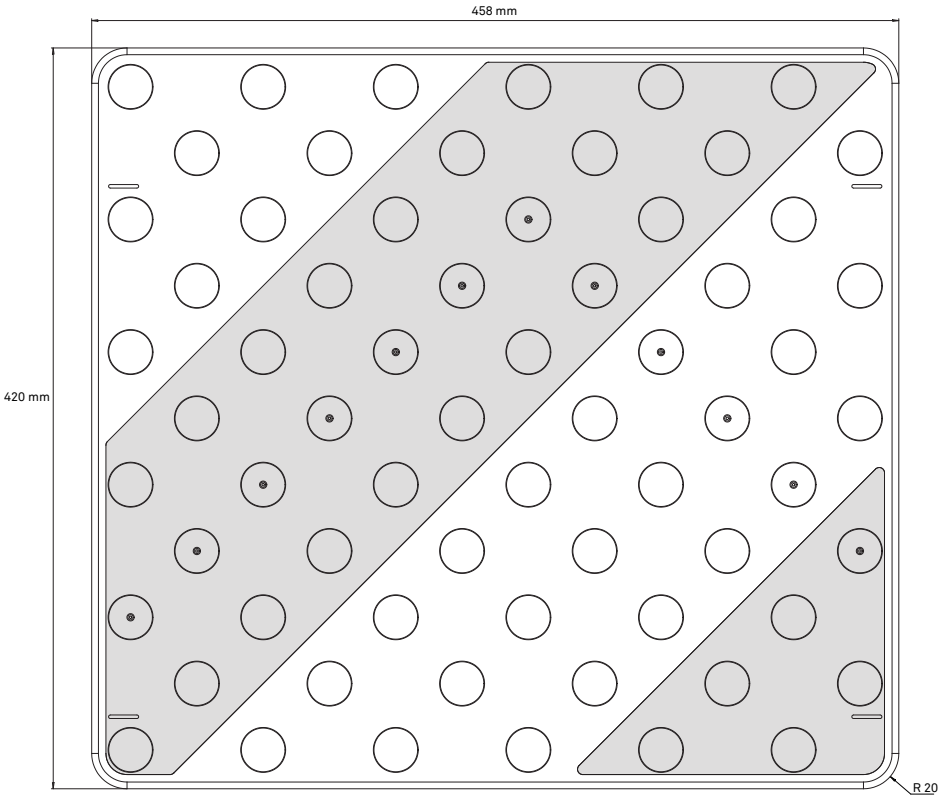


Color chart:


6102007 - Red-White


6102014 - Blue-White


6102069 - Black-Yellow


6102038 - Ivory-White


6102083 - Black-Grey


6102090 - Yellow-Grey

6102106 - Yellow-White


6102052 - Orange-White


6102021 - Grey-White


6102076 - Black-White

Technical features:

Material	PU
Colour	According the colour chart
Weight/Slab	735 g
Size	458 x 420 mm
Surface:	Flat and stippled
Color stripes	Inclined 45°
Embossed domes	Ø 25mm - height 5 mm
Norm NF P95-351	Fire, smoke classification
	Positioning of the domes compliant
	Wear indicator



NOVAP
AUTHORITIES

ACCESSIBILITY
Tactile Slabs

